



60 YEARS OF ITALIAN TRADITION

Luxor is an important industrial reality, world wide and European market leader in the production of flexible hoses and components for hydro and thermo-sanitary installations. Luxor has been the expression of the most prestigious made in Italy and the great Italian high technology mechanical workings tradition for fifty years; a quality certified and recognized by the most prestigious International Certification Institutes all over the world.

Our mission is the complete customer satisfaction through a process of continuous technological research in order to make high quality, reliable products, anticipating the market evolutions by innovative partnership with both customers and suppliers. Luxor mission takes

place in its own Research and Development Centre in which new and advanced technologies are constantly analyzed and researched with continuous investments to offer the most innovative and reliable solutions for the international markets at competitive costs, ensuring strict quality controls on each single piece.

Luxor entirely plans and realizes each product, thanks to its decennial know how. The great production strength, a "slender" innovative and advanced industrial organization together with a modern logistic conception, make Luxor able to satisfy every kind of request, even customized, with fast deliveries all over the world.



Luxor is certified
ISO 9001:2015
by DEKRA Group
certification body

CERTIFICATION



Please contact our offices for information about technical specifications and certified products or visit the website of the corresponding certification body for the latter.

Please refer to www.nsf.org for a complete list of NSF approved products.
Please refer to www.iapmort.org for a complete list of UPC/cUPC approved products.



FLEXIBLE HOSES

FLEXIBLE HOSES



Luxor's Flexible hoses are first rate Made in Italy products, reliable and top quality products worldwide renowned.


The excellent mechanical and hygienic features, the easiness of their installation and the good value of this product find a continuously increasing appreciation by installers and merchants. The constant attention given to the market demands, to customers' requirements and to the hygienic and environmental obligations, make Luxor's flexible hoses a clear point of reference in the sanitary-plumbing market.

Luxor's flexible hoses are the ideal solution for any type of installation for the distribution of sanitary and drinking water: reliable, easy to fit, cost effective. Luxor's industrial manufacturing process represents the state of the art for the high technology of the production machinery which guarantee a perfect production in every single step.

The hoses are thoroughly checked through severe quality controls, including high resolution photo-camera devices which can detect 100% any possible fault occurred during the production process.

Luxor's Company's Quality System and Luxor's flexible hoses are approved and certified by the most important International Institutes, which recognize and appreciate, besides the product technical qualities, also the Company's policy clearly addressed towards the customer's satisfaction and to the accomplishment to the rules requirements compulsory to the manufactured goods.

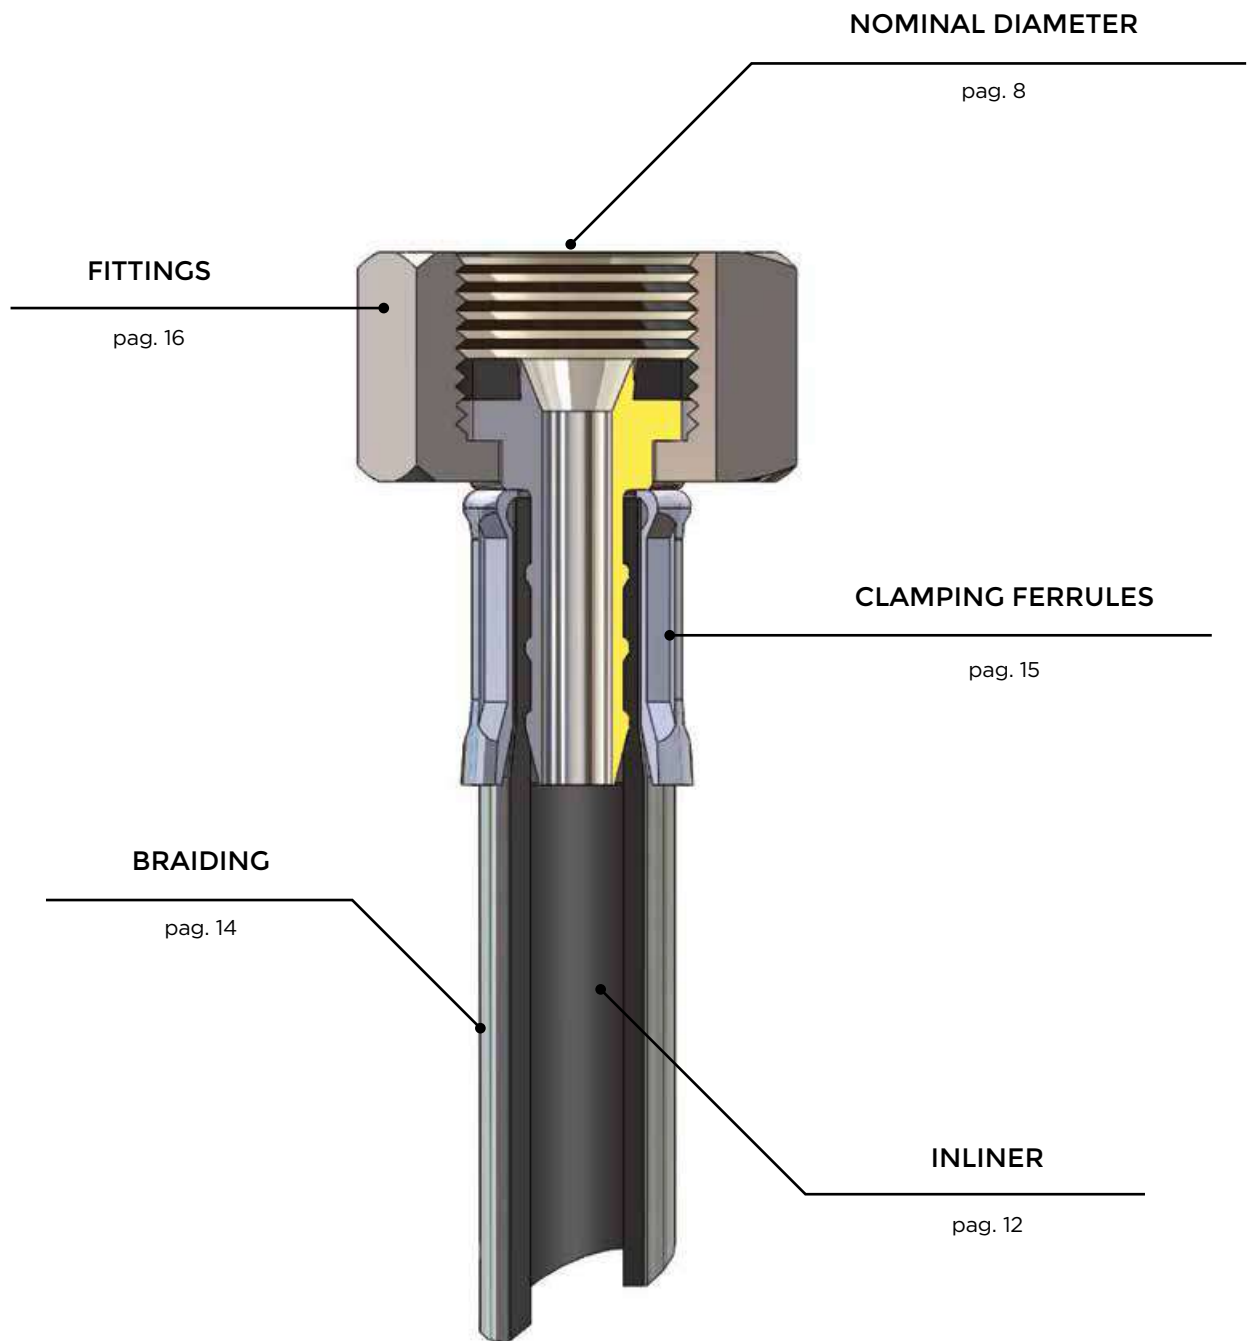

**APPLICATIONS**

pag. 10

APPROVALS

pag. 20

ASSEMBLY INSTRUCTIONS

pag. 118

LENGTH INSTRUCTIONS


















pag. 120

NOMINAL DIAMETER



Luxor Spa's range of hoses comprises products which comply with the most prominent international standards and the current European norm EN13618:2017.

The table below shows the most relevant technical features for every nominal diameter, as well as the availability with silicone, TP, EPDM, PEX and butyl inliner.


Inliner Range	Nominal Diameter	Inner ø mm	Outer ø mm	Min bending radius	Inner fittings ø mm	Flow rate at 3 bar	Max working pressure	Max working temperature	Min working temperature	Available Fittings	Available Braiddings
	DN6	6,3	10	40	4,7	16 l/min	10 Bar	70° C	-5° C	Brass, stainless steel, plastic	Stainless steel, nylon PA 6.6
	DN8	8,5	12	48	6,2	28 l/min	10 Bar	70° C	-5° C	Brass, stainless steel, plastic	Stainless steel, nylon PA 6.6
	DN8	8,5	12	48	6,2	28 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN10	9,4	13	56	7,5	46 l/min	10 Bar	70° C	-5° C	Brass, copper, stainless steel, plastic	Stainless steel, nylon PA 6.6
	DN10	9,4	13,5	56	7,5	46 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN13	12,5	18	72	10	74 l/min	10 Bar	70° C	-5° C	Brass, copper, stainless steel, plastic	Stainless steel, nylon PA 6.6
	DN13	12,5	18	72	10	74 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN15	15	20	80	12,5	83 l/min	10 Bar	110° C	-5° C	Brass, copper, stainless steel, galvanised steel	Stainless steel, galvanised steel
	DN15	15	20	80	12,5	83 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN18	19	26	104	15,5	200 l/min	10 Bar	110° C	-5° C	Brass, copper, stainless steel, galvanised steel	Stainless steel, galvanised steel
	DN18	19	26	104	15,5	200 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN25	25,5	33	132	21	280 l/min	10 Bar	110° C	-5° C	Brass, copper, stainless steel, galvanised steel	Stainless steel, galvanised steel
	DN25	25,5	33	132	21	280 l/min	10 Bar	90° C	-20° C	Brass	Stainless steel
	DN32	32	42	168	27	490 l/min	6 Bar	110° C	-5° C	Brass, stainless steel, galvanised steel	Stainless steel, galvanised steel
	DN32	32	42	168	27	490 l/min	6 Bar	90° C	-20° C	Brass	Stainless steel
	DN40	40	53	212	32	800 l/min	6 Bar	110° C	-5° C	Brass, stainless steel, galvanised steel	Stainless steel, galvanised steel
	DN50	50	65	275	41	1300 l/min	6 Bar	110° C	-5° C	Brass, stainless steel, galvanised steel	Stainless steel, galvanised steel

 Silicone
  EPDM
  Thermoplastic
  PEX
  Butyl


Please contact our technical department for further information

FLOW RATE CHARTS

Flow capacity diagram on hoses with straight fittings, length 1400 mm.

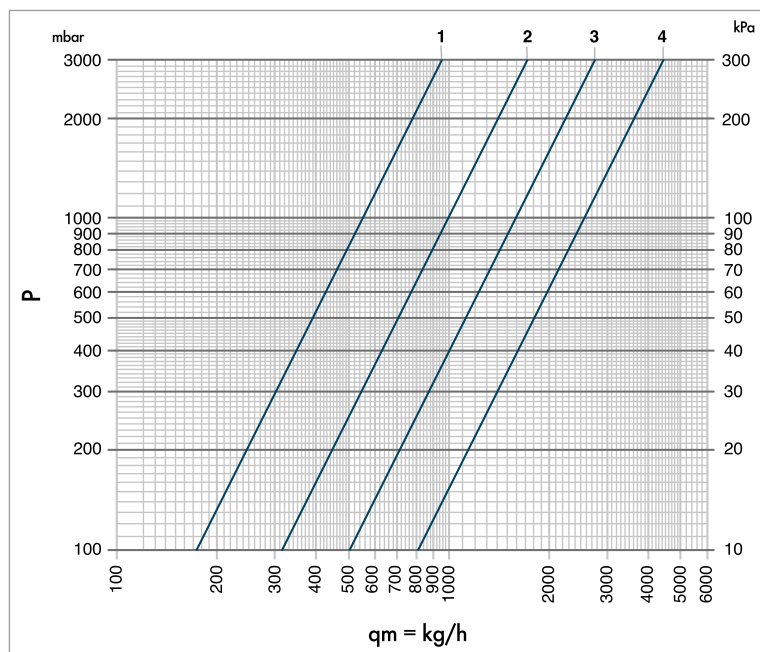

HOSE DIMENSIONS	POS	Kv	Flow l/min con ΔP 3 bar
DN 6	1	0,55	16
DN 8	2	0,97	28
DN 10	3	1,59	46
DN 13	4	2,56	74

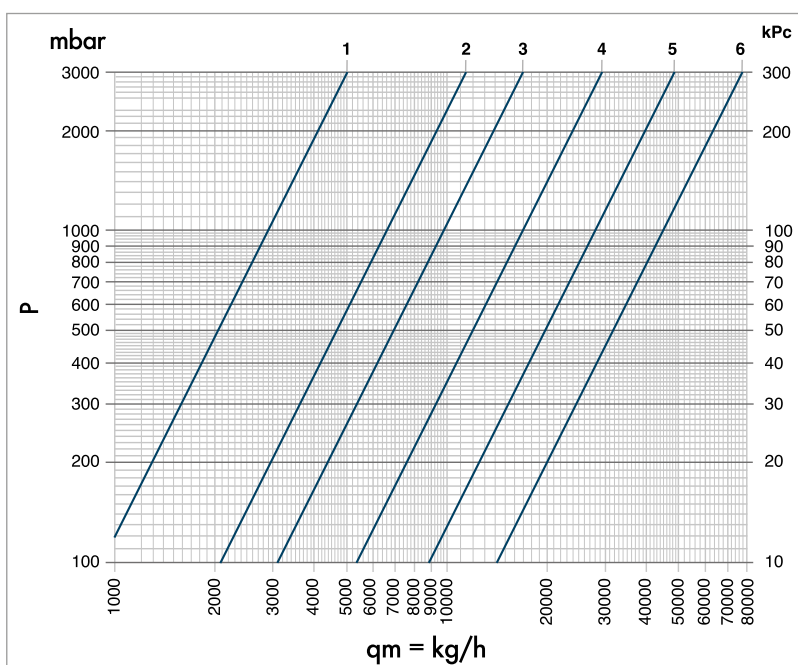

HOSE DIMENSIONS	POS	Kv	Flow l/min con ΔP 3 bar
DN 15	1	2,9	83
DN 18	2	6,6	200
DN 25	3	9,8	280
DN 30	4	17	490
DN 40	5	28	800
DN 50	6	45	1300

APPLICATIONS

Luxor Spa's flexible hoses are the ideal solution for every application, both sanitary and industrial. They are safe and easy to install.

The table below shows some of the most common applications, as well as the availability with silicone, TP, EPDM, PEX and butyl inliner.



traditional taps



mixers



heating systems



flushing tanks



boilers



kitchen pull-out shower



generic installations



conditioning systems /
fan coil



washing machines



mounting columns



water heaters



dishwasher



shower cabins




whirlpools































pumps



coffee machines



radiant ceiling panels

Inliner Range	Nominal diameter	Single-lever mixer taps	Two-handle faucets	Mixers	Pull-out shower faucets	Single-hole mixer taps	Coffee machines	Cisterns	Water installations	Sanitary systems	Boilers	Inlet hoses	Water meters	Whirlpools	Shower cubicles	Fancoils	Heating systems	Pumps	Autoclaves	Heat pumps	Air-conditioning systems	Greenhouses	Risers	Common installations	Radiant ceiling panels
   	DN6	•		•			•																		
   	DN8	•	•	•	•	•	•	•	•	•	•					•	•				•				•
  	DN10		•						•	•	•	•				•	•				•				•
   	DN13								•		•	•	•	•	•	•	•				•				•
 	DN15										•						•	•	•	•	•	•	•	•	
  	DN18																•	•	•	•	•	•	•	•	
  	DN25																•	•	•	•	•	•	•	•	
  	DN32																•	•	•		•	•	•	•	
	DN40																•	•	•			•	•	•	
	DN50																•	•	•			•	•	•	

 Silicone

 EPDM

 Thermoplastic

 PEX

 Butyl

INLINER

SILICONE

Silicone, a noble high-quality material, has gained growing recognition on sanitary markets at an international level.

It is the most hygienic material available on the market and guarantees complete purity. Outstanding elasticity and excellent mechanical properties throughout the temperature range exemplify its characteristics.



THERMOPLASTIC

As the result of years of R&D of noble and high-performance materials, TP combines the purity and hygiene of PEX and silicone with the outstanding mechanical properties of EPDM. Flexibility, versatility and usability make Luxor TP hoses a high-quality product certified by the most prominent international institutes. Luxor TP hoses were developed in order to protect the end users' wellbeing and the environment by being hygienically pure and completely recyclable.



EPDM

EPDM rubber is the most widespread inliner material. Available in various compounds, it shows excellent hygienic and mechanical characteristics as well as resistance to oxidation, environmental factors and high temperatures.



PEX

PEX is a thermoplastic material endowed with excellent hygienic properties which does not affect the taste and smell of water throughout the temperature range. PEX hoses have established themselves on the market as a good alternative to EPDM.



BUTYL

Butyl is a material with low oxygen permeability. This feature makes it suitable for all closed circuit applications where oxygen creates corrosion.





PROPERTIES	SILICONE	THERMOPLASTIC	EPDM	PEX	BUTYL
Hygienic Purity	●●●●●	●●●●	●●●	●●●●	-
Mechanical Resistance	●●●	●●●●	●●●●●	●●●	●●●
Resistance to Temperature	●●●●●	●●●●	●●●●●	●●	●●●
Durability	●●●●●	●●●●●	●●●●	●●●	●●●●
Flexibility	●●●●●	●●●●●	●●●●	●	●●●
Approvals	●●●●●	●●●●●	●●●	●●●	-
Range	●●●●	●●●	●●●●●	●	●●●●
Versatility	●●●●●	●●●	●●●●●	●	●

● Sufficient ●● Discrete ●●● Good ●●●● Very Good ●●●●● Excellent

BRAIDING



The external reinforcing braiding is made using stainless steel threads AISI 304 \varnothing 0,20 mm, \varnothing 0,22 mm, galvanized steel threads \varnothing 0,30 mm and Nylon threads PA 6.6 \varnothing 0,25 mm and \varnothing 0,30 mm.

These threads, joined to become plaits are assembled so to cover completely the inner pipe giving to the flexible hose the faculty to sustain the normal working pressure and the possible overpressure which can occur during an ordinary performance of the hydraulic system.

STAINLESS STEEL THREADS

The stainless steel threads have a minimum \varnothing 0,20 mm, a higher dimension of the one normally employed by other producers, so to guarantee a safe and reliable top quality product. Thanks to this excellent covering material, Luxor's flexible hoses have successfully passed the most severe mechanical tests of European and International Certification Institutes of the hydrosanitary field.

NYLON THREADS

The Nylon PA 6.6 threads also assure excellent resistance

and good mechanical qualities thanks to the elasticity of material and the good performance at high and low temperature. Flexible hoses with braiding in Nylon PA 6.6 have found a large market in the kitchen mixers with pull-out showers for example, due to their good performance and their resistance to the wear and tear due to the friction rub and to the low noise produced during the normal daily use.

BRAIDING

The braiding percentage of covering can change in accordance to the specific product requests and to the customer's requirements, going from a 97% cover until 80%.

The 97% braiding covers perfectly the inner pipe making the flexible hose mechanically more resistant to the strains and giving a better aesthetic exterior.

The thread dimension, the quality of the material and the covering percentage of the braiding distinguish Luxor's hoses, products with a high quality profile, from those of other producers.



CLAMPING FERRULES

The clamping ferrules of the end connectors are in stainless steel AISI 304 (from DN6 to DN50) and in aluminium (from DN15 to DN50), materials firm and safe, which differing from brass, are not subjects to breakage given by stress corrosion.

Next to the peculiar specific qualities of the stainless steel, that is the resistance to corrosion and oxidation, the stainless steel clamping ferrules AISI 304 are solubilized so to stress relieve and reduce the superficial hardness of the material and avoid the possible development of splits during the pressing process.

PRESSURE

The pressure of the clamping ferrules to the braided hose

and to the end connectors is made with an octagonal pressing process.

For special dimensional requirements is carried out a double pressing called "calibration" which allows a further external space reduction of the clamping ferrules.

IDENTIFICATION MARK

All Luxor's flexible hoses are clearly and rigorously marked with an identification mark on the clamping ferrules bearing the mark LUX, year of production and the technical-regulation quotes.

By marking the hose each producer assumes his responsibility of what is produced: **BEWARE OF HOSES WITH NO NAME!**



FITTINGS



The end connectors are produced in brass CW617N and CW614N with low lead content in compliance to the recent rules UNI EN12165 and UNI EN12164.

For some markets, or for some particular applications, are also available fittings in brass CW602N, which differs from the commonly used brass, since it prevents the brass from dezincification caused by the loss of zinc and the consequent redeposit of copper.

Though the percentage of lead within the brass alloys for the fittings are low and guaranteed by the European regulation, the new challenge that producers of plumbing material are facing is the total exclusion of lead from the manufactured products. With the main target to constantly improve the hygienic quality of the product and to improve the pureness of the materials, Luxor is engaged to use for particular markets brass Ecobrass type with zero percentage of lead.

The fittings, based on the specific markets demands or on product certification requirement, undergo further manufacturing processes such as: normalization (to stress relieve the material and reduce the surface hardness and avoid the occurring of production cracks).

For particular application, where high resistance to oxidation and good resistance to mechanical stress is required,

the fittings are produced in stainless steel AISI304.

Other fittings are produced in deoxidated phosphor copper Cu-DHP quality with chemical composition: Cu 99,9% min, whose mechanical qualities, dimensions and tolerances are in compliance to the EN1057 rule and its connected regulations.

For particular requirements and for those markets less demanding are also available end connectors in steel AVP.

SEALING GASKETS AND O-RINGS

The water tightness of the end connectors is guaranteed by the use of gaskets and o-rings in EPDM and NBR, materials with high ozone free properties, which preserve their tightening features and mechanical resistance throughout times.


The compounds used, thanks to the excellent hygienic properties, are fit for drinking water adduction, and have been approved by the most rigorous Certification Institutes of the hydrosanitary field.






















The mechanical, physical and hygienic qualities of the gaskets and o-rings are constantly tested with specific laboratory tests both carried out internally or externally to verify their conformity to the rules requirements.








TYPE OF FITTINGS

Luxor's main target is that to satisfy the customer during the development process of the new products and give new technical solutions.

Inliner Range	Nominal Diameter				
 Silicone  EPDM  Thermoplastic  PEX	DN6	Short male M 8x1 - 18 mm M 10x1 - 18 mm M 11x1 - 20 mm 	Medium male M 8x1 - 44 mm M 10x1 - 44 mm 	Long male M 8x1 - 74 mm M 10x1 - 74 mm 	Smooth Pipe ø 10 mm 
		Safety end Pipe ø 8 mm ø 10 mm 	Female without gasket G 1/4 - G 3/8 - G 1/8 G 1/2 - M 10x1 M 15x1 M 12x1 - 9/16 - 24 unef 	Collar G 1/2 	Male G 1/8 G 3/8 G 1/2 
		Swivel Male M 12x1 M 15x1 G 3/8 	Female with gasket G 3/8 - G 1/2 M 10x1 - M 15x1 9/16 - 24 unef 		

Inliner Range	Nominal Diameter				
 Silicone  EPDM  Thermoplastic  Butyl	DN8	Short male M 10x1 - 18 mm M 11x1 - 19 mm M 12x1 - 19 mm 	Medium male M 10x1 - 46 mm M 12x1 - 43 mm 	Long male M 10x1 - 74 mm M 12x1 - 75 mm 	Smooth Pipe ø 10 mm ø 15 mm 
		Safety end Pipe ø 10 mm 	Male G 1/4 G 3/8 G 1/2 G 3/4 	Female without gasket G 1/4 - G 3/8 - G 1/2 G 3/4 - M 15x1 	Elbow Female without gasket G 1/4 - G 3/8 G 1/2 - G 3/4 
		Compressor Fitting ø 10 mm ø 12 mm ø 14 mm ø 15 mm 	Swivel Male M 15x1 G 3/8 G 1/2 	Collar G 1/2 	Female with o-ring G 3/8 
		Elbow Female with o-ring G 3/8 	Female with gasket G 3/8 - G 1/2 G 3/4 - 1/2 NPSM 9/16 - 24 unef 	Elbow Female with gasket G 3/8 - G 1/2 G 3/4 	Extended Male G 3/8 - 26 mm G 1/2 - 28 mm 
		Push-Fit Fitting ø 8 			

FLEXIBLE HOSES

Inliner Range	Nominal Diameter								
<div><div></div> EPDM</div> <div><div></div> Thermoplastic</div> <div><div></div> Butyl</div>	DN10	<div>Short male M 12x1 - 16 mm</div> <div></div> <div>Male G 1/4 G 3/8 G 1/2</div> <div></div> <div>Female without gasket G 3/8 G 1/2 G 3/4</div> <div></div> <div>Elbow Female without gasket G 3/8 G 1/2 G 3/4</div> <div></div>	<div>Compressor Fitting ø 10 mm ø 12 mm ø 14 mm ø 15 mm</div> <div></div> <div>Wings Female with or without o-ring G 1/2</div> <div></div> <div>Swivel Male G 3/8 G 1/2</div> <div></div> <div>Brass Push-Fit ø 12</div> <div></div>	<div>Female with gasket G 3/8 - G 1/2 G 3/4</div> <div></div> <div>Elbow Female with gasket G 1/2 - G 3/4</div> <div></div> <div>Extended Male G 3/8 - 26 mm G 1/2 - 28 mm</div> <div></div> <div></div>					

Inliner Range	Nominal Diameter								
<div><div></div> Silicone</div> <div><div></div> EPDM</div> <div><div></div> Thermoplastic</div> <div><div></div> Butyl</div>	DN13	Male G 3/8 G 1/2 G 3/4		Female without gasket G 3/8 G 1/2 G 3/4		Elbow Female without gasket G 1/2 G 3/4 G 1"		Smooth Pipe ø 15 mm	
		Safety end Pipe ø 15 mm		Compressor Fitting ø 12 mm ø 15 mm		Brass Push-Fit ø 12		Female with gasket G 1/2 - G 3/4	
		Elbow Female with gasket G 1/2 - G 3/4		Extended Male G 1/2 - 28 mm					

Inliner Range	Nominal Diameter								
<div><div></div> EPDM</div> <div><div></div> Butyl</div>	DN15	Male G 1/2 G 3/4		Female G 1/2 G 3/4		Elbow Female G 1/2 G 3/4		Smooth Pipe ø 15 mm	

Inliner Range	Nominal Diameter								
<div><div></div> Silicone</div> <div><div></div> EPDM</div> <div><div></div> Butyl</div>	DN18	Male G 3/4 G 1"		Female G 3/4 G 1"		Elbow Female G 3/4 G 1"		Smooth Pipe ø 22 mm	



































































Inliner Range	Nominal Diameter								
<div><div></div> Silicone</div> <div><div></div> EPDM</div> <div><div></div> Butyl</div>	DN25	Male G 1"		Female G 1" G 1" 1/4 G 1" 1/2		Elbow Female G 1"		Smooth Pipe ø 28 mm	

























































Inliner Range	Nominal Diameter						
<div><div></div> Silicone</div> <div><div></div> EPDM</div> <div><div></div> Butyl</div>	DN32	Male G 1" 1/4		Female G 1" 1/4		Elbow Female G 1" 1/4	

Inliner Range	Nominal Diameter		
 EPDM	DN40	Male G 1" 1/2	Female G 1" 1/2

Inliner Range	Nominal Diameter		
 EPDM	DN50	Male G 2"	Female G 2"















































APPROVALS
























































Nominal Diameter	
DN6	<div><div> IT-01-60413</div><div><div>Nation: Italy</div><div></div></div><div><div>Certification: DM 174</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: France</div><div></div></div><div><div>Certification: QB</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Holland</div><div></div></div><div><div>Certification: KIWA</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: USA</div><div></div></div><div><div>Certification: NSF - IAPMO</div></div><div><div>Inliner Range:</div><div> (NSF - IAPMO)  (NSF)</div></div></div>
	<div><div></div><div><div>Nation: Australia</div><div></div></div><div><div>Certification: WATERMARK</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Germany</div><div></div></div><div><div>Certification: DVGW</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Switzerland</div><div></div></div><div><div>Certification: SVGW</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: UE</div><div></div></div><div><div>Certification: EN 13618</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Denmark</div><div></div></div><div><div>Certification: VA</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Norway</div><div></div></div><div><div>Certification: SINTEF</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: Sweden</div><div></div></div><div><div>Certification: RISE</div></div><div><div>Inliner Range:</div><div></div></div></div>
	<div><div></div><div><div>Nation: UK</div><div></div></div><div><div>Certification: WRAS</div></div><div><div>Inliner Range:</div><div></div></div></div>

Nominal Diameter						
DN8	<div> IT-01-450413</div> <div>Nation: Italy</div> <div>Certification: DM 174</div> <div>Inliner Range: </div>	<div></div> <div>Nation: Australia</div> <div>Certification: WATERMARK</div> <div>Inliner Range: </div>	<div></div> <div>Nation: Denmark</div> <div>Certification: VA</div> <div>Inliner Range: </div>			
	<div></div> <div>Nation: France</div> <div>Certification: QB</div> <div>Inliner Range: </div>	<div></div> <div>Nation: Germany</div> <div>Certification: DVGW - TÜV</div> <div>Inliner Range:  (DVGW - TÜV)  (DVGW)</div>	<div></div> <div>Nation: Norway</div> <div>Certification: SINTEF</div> <div>Inliner Range: </div>			
	<div></div> <div>Nation: Holland</div> <div>Certification: KIWA</div> <div>Inliner Range: </div>	<div></div> <div>Nation: Switzerland</div> <div>Certification: SVGW</div> <div>Inliner Range: </div>	<div></div> <div>Nation: Sweden</div> <div>Certification: RISE</div> <div>Inliner Range: </div>			
	<div></div> <div>Nation: USA</div> <div>Certification: NSF - IAPMO</div> <div>Inliner Range: </div>	<div></div> <div>Nation: UE</div> <div>Certification: EN 13618</div> <div>Inliner Range: </div>	<div></div> <div>Nation: UK</div> <div>Certification: WRAS</div> <div>Inliner Range: </div>			

 Silicone
  EPDM
  Thermoplastic
  PEX






















































Please contact our offices for information about technical specifications and certified products or visit the website of the corresponding certification body for the latter. Please refer to www.nsf.org for a complete list of NSF approved products. Please refer to www.iapmo.org for a complete list of UPC/cUPC approved products.

Nominal Diameter			
DN10	<div><div> IT-DT-K0413</div><div><div>Nation: Italy</div><div>Certification: DM 174</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: Australia</div><div>Certification: WATERMARK</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: Denmark</div><div>Certification: VA</div><div>Inliner Range:</div></div><div></div></div>
	<div><div></div><div><div>Nation: France</div><div>Certification: QB</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: Germany</div><div>Certification: DVGW - TÜV</div><div>Inliner Range:</div></div><div> (TÜV)  (DVGW)</div></div>	<div><div></div><div><div>Nation: Norway</div><div>Certification: SINTEF</div><div>Inliner Range:</div></div><div></div></div>
	<div><div></div><div><div>Nation: Holland</div><div>Certification: KIWA</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: Switzerland</div><div>Certification: SVGW</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: Sweden</div><div>Certification: RISE</div><div>Inliner Range:</div></div><div></div></div>
	<div><div></div><div><div>Nation: USA</div><div>Certification: NSF - IAPMO</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: UE</div><div>Certification: EN 13618</div><div>Inliner Range:</div></div><div></div></div>	<div><div></div><div><div>Nation: UK</div><div>Certification: WRAS</div><div>Inliner Range:</div></div><div></div></div>

Nominal Diameter						
DN13		Nation: Italy  Certification: DM 174 Inliner Range:   		Nation: Australia  Certification: WATERMARK Inliner Range:   		Nation: Denmark  Certification: VA Inliner Range:  
		Nation: France  Certification: QB Inliner Range:   		Nation: Germany  Certification: DVGW - TÜV Inliner Range:  (DVGW - TÜV)  (TÜV)  (DVGW)		Nation: Norway  Certification: SINTEF Inliner Range:  
		Nation: Holland  Certification: KIWA Inliner Range:  		Nation: Switzerland  Certification: SVGW Inliner Range:  		Nation: Sweden  Certification: RISE Inliner Range:  
		Nation: USA  Certification: NSF - IAPMO Inliner Range:   		Nation: UE  Certification: EN 13618 Inliner Range:   		Nation: UK  Certification: WRAS Inliner Range:   

 Silicone
  EPDM
  Thermoplastic
  PEX

Please contact our offices for information about technical specifications and certified products or visit the website of the corresponding certification body for the latter. Please refer to www.nsf.org for a complete list of NSF approved products. Please refer to www.iapmo.org for a complete list of UPC/cUPC approved products.

Nominal Diameter						
DN15		Nation: France 		Nation: Germany 	EN 13618	Nation: UE 
		Certification: QB		Certification: TÜV		Certification: EN 13618
		Inliner Range: 		Inliner Range: 		Inliner Range: 
Nominal Diameter						
DN18		Nation: France 	 	Nation: Germany 	EN 13618	Nation: UE 
		Certification: QB		Certification: DVGW - TÜV		Certification: EN 13618
		Inliner Range: 		Inliner Range:  (DVGW - TÜV)  (TÜV)		Inliner Range:  
		Nation: UK 				
		Certification: WRAS				
Inliner Range: 						
Nominal Diameter						
DN25		Nation: France 	 	Nation: Germany 	EN 13618	Nation: UE 
		Certification: QB		Certification: DVGW - TÜV		Certification: EN 13618
		Inliner Range: 		Inliner Range:  (DVGW - TÜV)  (TÜV)		Inliner Range:  
Nominal Diameter						
DN32		Nation: France 	 	Nation: Germany 		
		Certification: QB		Certification: DVGW - TÜV		
		Inliner Range: 		Inliner Range:  (DVGW - TÜV)  (TÜV)		
Nominal Diameter						
DN40		Nation: France 		Nation: Germany 		
		Certification: QB		Certification: TÜV		
		Inliner Range: 		Inliner Range: 		
Nominal Diameter						
DN50		Nation: France 		Nation: Germany 		
		Certification: QB		Certification: TÜV		
		Inliner Range: 		Inliner Range: 		

 Silicone
  EPDM

Please contact our offices for information about technical specifications and certified products or visit the website of the corresponding certification body for the latter. Please refer to www.nsf.org for a complete list of NSF approved products. Please refer to www.iapmrt.org for a complete list of UPC/cUPC approved products.



FLEXIBLE HOSES FOR INDUSTRIAL APPLIANCES

4.1 / ACFZ-S

ACFZ-S









GALVANIZED STEEL FLEXIBLES



For industrial applications where a high flow rate and a high maximum temperature are required, these large hoses, from

diameter DN15 to DN50, are used.

TECHNICAL DATA

			
DN	Max temperature	Max pressure	Flow rate at 3 bar
15	110 °C	10 bar	83 l/min
18		10 bar	200 l/min
25		10 bar	280 l/min
32		6 bar	490 l/min
40		6 bar	800 l/min
50		6 bar	1300 l/min
			
Min. bending radius	Inliner pipe	Braiding	Fittings
80 mm	EPDM	GALVANIZED STEEL	GALVANIZED STEEL
104 mm			o
132 mm			GALVANIZED CW617N
168 mm			
212 mm			
275 mm			

APPLICATIONS



pumps



mounting columns



heating systems



generic installations

INLINER PIPE



EPDM

EPDM rubber is the most widespread inliner material. Available in various compounds, it shows excellent hygienic and mechanical characteristics as well as resistance to oxidation, environmental factors and high temperatures.

TYPE OF FITTINGS

Male

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Female

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Elbow Female

G 1/2
G 3/4
G 1"
G 1" 1/4




Instructions
Pag. 118




Please contact our technical department for further information

AC 1501

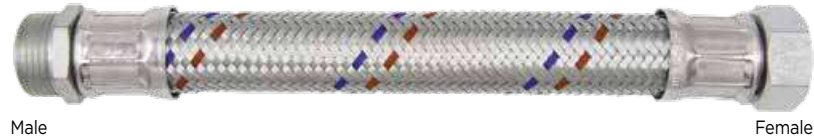● G 1/2




● G 1/2




CODE	FITTINGS	DN	LENGHT mm			
QZMANZ0300LAE	Male G 1/2 Female G 1/2	15	300	187	5	-
QZMANZ0400LAE			400	222	5	-
QZMANZ0500LAE			500	257	5	-
QZMANZ0600LAE			600	291	5	-
QZMANZ0700LAE			700	326	5	-
QZMANZ0800LAE			800	360	5	-
QZMANZ1000LAE			1000	430	5	-

AC 1801

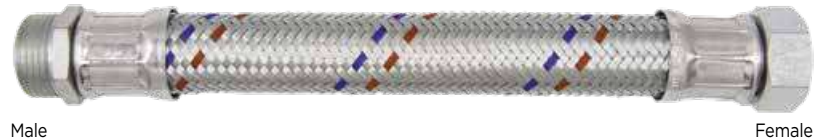● G 3/4




● G 3/4




CODE	FITTINGS	DN	LENGHT mm			
SZMBTG0300LAE	Male G 3/4 Female G 3/4	18	300	260	5	-
SZMBTG0400LAE			400	312	5	-
SZMBTG0500LAE			500	362	5	-
SZMBTG0600LAE			600	413	5	-
SZMBTG0700LAE			700	464	5	-
SZMBTG0800LAE			800	515	5	-
SZMBTG1000LAE			1000	617	5	-

AC 1802

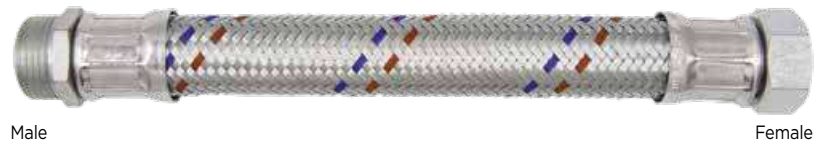● G 1"




● G 1"




CODE	FITTINGS	DN	LENGHT mm			
SZMABG0300LAE	Male G 1" Female G 1"	18	300	321	5	-
SZMABG0400LAE			400	371	5	-
SZMABG0500LAE			500	422	5	-
SZMABG0600LAE			600	473	5	-
SZMABG0700LAE			700	524	5	-
SZMABG0800LAE			800	575	5	-
SZMABG1000LAE			1000	677	5	-

AC 2501

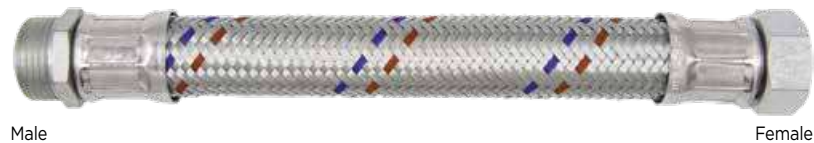● G 1"



● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TZMABG0300LAE	Male G 1" Female G 1"	25	300	389	5	-
TZMABG0400LAE			400	459	5	-
TZMABG0500LAE			500	530	5	-
TZMABG0600LAE			600	601	5	-
TZMABG0700LAE			700	672	5	-
TZMABG0800LAE			800	742	5	-
TZMABG1000LAE			1000	884	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings


GALVANIZED STEEL
o
GALVANIZED CW617N

Instructions

Pag. 118

AC 3201

● G 1" 1/4

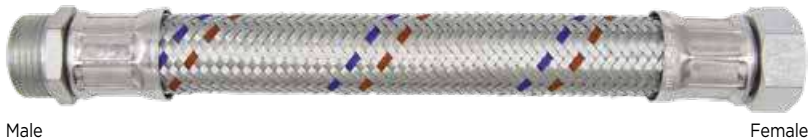


● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VZMAGG0300LAE	Male G 1" 1/4 Female G 1" 1/4	32	300	681	2	-
VZMAGG0400LAE			400	789	2	-
VZMAGG0500LAE			500	897	2	-
VZMAGG0600LAE			600	1.005	2	-
VZMAGG0700LAE			700	1.113	2	-
VZMAGG0800LAE			800	1.221	2	-
VZMAGG1000LAE			1000	1.437	2	-

AC 4001

● G 1" 1/2

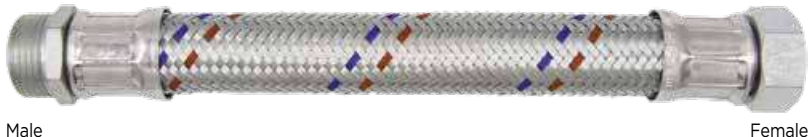


● G 1" 1/2

CODE	FITTINGS	DN	LENGHT mm			
XZMAEB0300LAE	Male G 1" 1/2 Female G 1" 1/2	40	300	1.097	2	-
XZMAEB0400LAE			400	1.258	2	-
XZMAEB0500LAE			500	1.418	2	-
XZMAEB0600LAE			600	1.579	2	-
XZMAEB0700LAE			700	1.740	2	-
XZMAEB0800LAE			800	1.900	2	-
XZMAEB1000LAE			1000	2.222	2	-

AC 5001

● G 2"

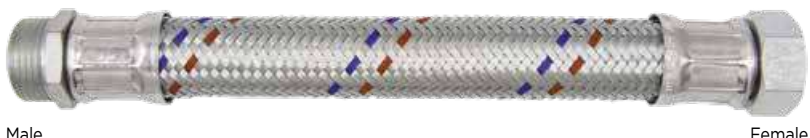

● G 2"

CODE	FITTINGS	DN	LENGHT mm			
ZZMBNB0300LAE	Male G 2" Female G 2"	50	300	1.553	1	-
ZZMBNB0400LAE			400	1.776	1	-
ZZMBNB0500LAE			500	1.998	1	-
ZZMBNB0600LAE			600	2.221	1	-
ZZMBNB0700LAE			700	2.444	1	-
ZZMBNB0800LAE			800	2.667	1	-
ZZMBNB1000LAE			1000	3.113	1	-



DN
32
40
50



Max temperature
110 °C



Max pressure
6 bar
6 bar
6 bar



Flow rate at 3 bar
490 l/min
800 l/min
1300 l/min



Min. bending radius
168 mm
212 mm
275 mm



Inliner pipe
EPDM



Braiding
GALVANIZED STEEL



Fittings
GALVANIZED STEEL



Instructions
Pag. 118

AC 1502




● G 1/2



Female

Female

● G 1/2

CODE	FITTINGS	DN	LENGHT mm			
QZMFHZ0300LAE	Female G 1/2	15	300	183	5	-
QZMFHZ0400LAE			400	218	5	-
QZMFHZ0500LAE			500	253	5	-
QZMFHZ0600LAE			600	287	5	-
QZMFHZ0700LAE	Female G 1/2		700	322	5	-
QZMFHZ0800LAE			800	356	5	-
QZMFHZ1000LAE			1000	425	5	-

AC 1803




● G 3/4



Female

Female

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
SZMGCG0300LAE	Female G 3/4	18	300	272	5	-
SZMGCG0400LAE			400	323	5	-
SZMGCG0500LAE			500	374	5	-
SZMGCG0600LAE			600	425	5	-
SZMGCG0700LAE	Female G 3/4		700	476	5	-
SZMGCG0800LAE			800	527	5	-
SZMGCG1000LAE			1000	629	5	-

AC 1804




● G 1"



Female

Female

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
SZMFBG0300LAE	Female G 1"	18	300	336	5	-
SZMFBG0400LAE			400	387	5	-
SZMFBG0500LAE			500	438	5	-
SZMFBG0600LAE			600	489	5	-
SZMFBG0700LAE	Female G 1"		700	540	5	-
SZMFBG0800LAE			800	590	5	-
SZMFBG1000LAE			1000	693	5	-

AC 2502




● G 1"



Female

Female

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TZMFBG0300LAE	Female G 1"	25	300	388	5	-
TZMFBG0400LAE			400	459	5	-
TZMFBG0500LAE			500	529	5	-
TZMFBG0600LAE			600	600	5	-
TZMFBG0700LAE	Female G 1"		700	671	5	-
TZMFBG0800LAE			800	741	5	-
TZMFBG1000LAE			1000	883	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings

GALVANIZED STEEL



Instructions

Pag. 118

AC 3202

● G 1" 1/4



● G 1" 1/4

Female

Female

CODE	FITTINGS	DN	LENGHT mm			
VZMFFG0300LAE	Female G 1" 1/4	32	300	672	2	-
VZMFFG0400LAE			400	780	2	-
VZMFFG0500LAE			500	888	2	-
VZMFFG0600LAE			600	995	2	-
VZMFFG0700LAE	Female G 1" 1/4	32	700	1.103	2	-
VZMFFG0800LAE			800	1.211	2	-
VZMFFG1000LAE			1000	1.427	2	-

AC 4002

● G 1" 1/2



● G 1" 1/2

Female

Female

CODE	FITTINGS	DN	LENGHT mm			
XZMFG0300LAE	Female G 1" 1/2	40	300	1.134	2	-
XZMFG0400LAE			400	1.295	2	-
XZMFG0500LAE			500	1.456	2	-
XZMFG0600LAE			600	1.616	2	-
XZMFG0700LAE	Female G 1" 1/2	40	700	1.777	2	-
XZMFG0800LAE			800	1.937	2	-
XZMFG1000LAE			1000	2.259	2	-

AC 5002

● G 2"



● G 2"

Female

Female

CODE	FITTINGS	DN	LENGHT mm			
ZZMGAB0300LAE	Female G 2"	50	300	1.566	1	-
ZZMGAB0400LAE			400	1.789	1	-
ZZMGAB0500LAE			500	2.012	1	-
ZZMGAB0600LAE			600	2.235	1	-
ZZMGAB0700LAE	Female G 2"	50	700	2.458	1	-
ZZMGAB0800LAE			800	2.681	1	-
ZZMGAB1000LAE			1000	3.127	1	-



DN

32
40
50



Max temperature

110 °C



Max pressure

6 bar
6 bar
6 bar



Flow rate at 3 bar

490 l/min
800 l/min
1300 l/min



Min. bending radius

168 mm
212 mm
275 mm



Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings

GALVANIZED STEEL




Instructions




Pag. 118

AC 1503

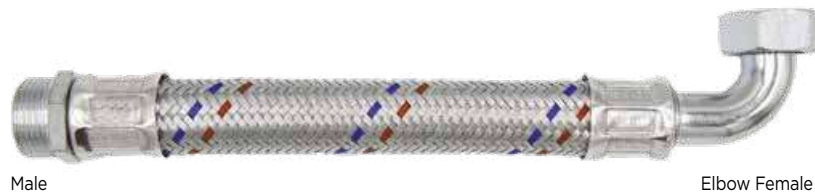● G 1/2



● G 1/2




CODE	FITTINGS	DN	LENGHT mm			
QZMECZ0300LAE	Male G 1/2 Elbow Female G 1/2	15	300	201	5	-
QZMECZ0400LAE			400	236	5	-
QZMECZ0500LAE			500	270	5	-
QZMECZ0600LAE			600	305	5	-
QZMECZ0700LAE			700	340	5	-
QZMECZ0800LAE			800	374	5	-
QZMECZ1000LAE			1000	443	5	-

AC 1805

● G 3/4



● G 3/4




CODE	FITTINGS	DN	LENGHT mm			
SZMEYG0300LAE	Male G 3/4 Elbow Female G 3/4	18	300	280	5	-
SZMEYG0400LAE			400	330	5	-
SZMEYG0500LAE			500	382	5	-
SZMEYG0600LAE			600	432	5	-
SZMEYG0700LAE			700	483	5	-
SZMEYG0800LAE			800	535	5	-
SZMEYG1000LAE			1000	637	5	-

AC 1806

● G 1"




● G 1"

CODE	FITTINGS	DN	LENGHT mm			
SZMDVG0300LAE	Male G 1" Elbow Female G 1"	18	300	317	2	-
SZMDVG0400LAE			400	368	2	-
SZMDVG0500LAE			500	419	2	-
SZMDVG0600LAE			600	470	2	-
SZMDVG0700LAE			700	520	2	-
SZMDVG0800LAE			800	571	2	-
SZMDVG1000LAE			1000	673	2	-

DN
15
18Max temperature
110 °CMax pressure
10 bar
10 barFlow rate at 3 bar
83 l/min
200 l/minMin. bending radius
80 mm
104 mmInliner pipe
EPDMBraiding
GALVANIZED STEELFittings
GALVANIZED STEELInstructions
Pag. 118

AC 2503

● G 1"

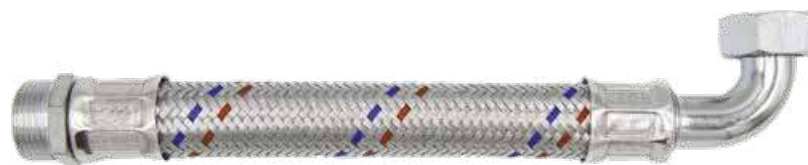

Male


Elbow Female

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TZMDVG0300LAE	Male G 1" Elbow Female G 1"	25	300	394	2	-
TZMDVG0400LAE			400	465	2	-
TZMDVG0500LAE			500	535	2	-
TZMDVG0600LAE			600	606	2	-
TZMDVG0700LAE			700	677	2	-
TZMDVG0800LAE			800	748	2	-
TZMDVG1000LAE			1000	889	2	-

AC 3203

● G 1" 1/4

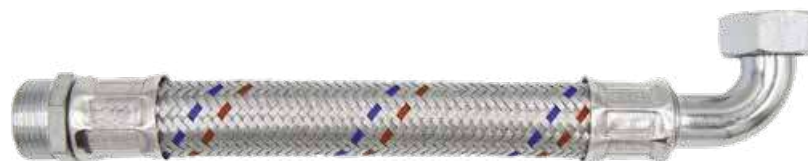

Male

Elbow Female

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VZMDZG0300LAE	Male G 1" 1/4 Stainless steel Elbow Female G 1" 1/4	32	300	706	2	-
VZMDZG0400LAE			400	814	2	-
VZMDZG0500LAE			500	922	2	-
VZMDZG0600LAE			600	1.030	2	-
VZMDZG0700LAE			700	1.138	2	-
VZMDZG0800LAE			800	1.246	2	-
VZMDZG1000LAE			1000	1.462	2	-



DN
25
32



Max temperature
110 °C



Max pressure
10 bar
6 bar



Flow rate at 3 bar
280 l/min
490 l/min



Min. bending radius
132 mm
168 mm



Inliner pipe
EPDM



Braiding
GALVANIZED STEEL



Fittings
GALVANIZED STEEL



Instructions
Pag. 118



FLEXIBLE HOSES FOR INDUSTRIAL APPLIANCES

4.2 / ACFZ-B

ACFZ-B BRASS FITTINGS



To meet the needs of more customers, ACFZ-B tubes were created, combining the cost-effectiveness of galvanised steel

el braids with the best features of brass fittings. These hoses are available from DN15 to DN50.

TECHNICAL DATA



DN

15
18
25
32
40
50



Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar
6 bar
6 bar
6 bar



Flow rate at 3 bar

83 l/min
200 l/min
280 l/min
490 l/min
800 l/min
1300 l/min



Min. bending radius

80 mm
104 mm
132 mm
168 mm
212 mm
275 mm



Inliner pipe

EPDM



Braiding

GALVANIZED
STEEL



Fittings

CW617N

APPLICATIONS



pumps



mounting columns



heating systems



generic installations

INLINER PIPE



EPDM

EPDM rubber is the most widespread inliner material. Available in various compounds, it shows excellent hygienic and mechanical characteristics as well as resistance to oxidation, environmental factors and high temperatures.

TYPE OF FITTINGS

Male (Brass fittings)

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Female (Brass fittings)

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Elbow Female (Brass fittings)

G 1/2
G 3/4
G 1"
G 1" 1/4



Instructions
Pag. 118

Please contact our technical department for further information

AC 1504




● G 1/2



Male (Brass fittings)

Female (Brass fittings)

● G 1/2

CODE	FITTINGS	DN	LENGHT mm			
QZMANS0300LAE	Male (Brass fittings) G 1/2	15	300	181	5	-
QZMANS0400LAE			400	216	5	-
QZMANS0500LAE			500	250	5	-
QZMANS0600LAE			600	285	5	-
QZMANS0700LAE	Female (Brass fittings) G 1/2		700	320	5	-
QZMANS0800LAE			800	354	5	-
QZMANS1000LAE			1000	423	5	-

AC 1807




● G 3/4



Male (Brass fittings)

Female (Brass fittings)

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
SZMBSS0300LAE	Male (Brass fittings) G 3/4	18	300	265	5	-
SZMBSS0400LAE			400	316	5	-
SZMBSS0500LAE			500	367	5	-
SZMBSS0600LAE			600	418	5	-
SZMBSS0700LAE	Female (Brass fittings) G 3/4		700	469	5	-
SZMBSS0800LAE			800	520	5	-
SZMBSS1000LAE			1000	622	5	-

AC 2504




● G 1"



Male (Brass fittings)

Female (Brass fittings)

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TZMAAS0300LAE	Male (Brass fittings) G 1"	25	300	412	5	-
TZMAAS0400LAE			400	483	5	-
TZMAAS0500LAE			500	554	5	-
TZMAAS0600LAE			600	624	5	-
TZMAAS0700LAE	Female (Brass fittings) G 1"		700	695	5	-
TZMAAS0800LAE			800	766	5	-
TZMAAS1000LAE			1000	907	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings

CW617N



Instructions

Pag. 118

AC 3204

● G 1" 1/4



Male (Brass fittings)


Female (Brass fittings)

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VZMAFS0300LAE	Male (Brass fittings) G 1" 1/4	32	300	714	2	-
VZMAFS0400LAE			400	822	2	-
VZMAFS0500LAE			500	930	2	-
VZMAFS0600LAE			600	1.038	2	-
VZMAFS0700LAE	Female (Brass fittings) G 1" 1/4	32	700	1.146	2	-
VZMAFS0800LAE			800	1.254	2	-
VZMAFS1000LAE			1000	1.470	2	-

AC 4003

● G 1" 1/2

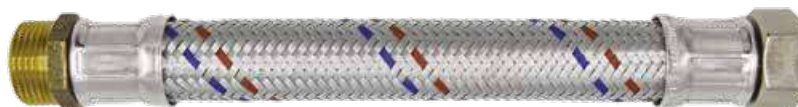

Male (Brass fittings)


Female (Brass fittings)

● G 1" 1/2

CODE	FITTINGS	DN	LENGHT mm			
XZMAES0300LAE	Male (Brass fittings) G 1" 1/2	40	300	1.140	2	-
XZMAES0400LAE			400	1.300	2	-
XZMAES0500LAE			500	1.461	2	-
XZMAES0600LAE			600	1.622	2	-
XZMAES0700LAE	Female (Brass fittings) G 1" 1/2	40	700	1.783	2	-
XZMAES0800LAE			800	1.943	2	-
XZMAES1000LAE			1000	2.264	2	-

AC 5003

● G 2"

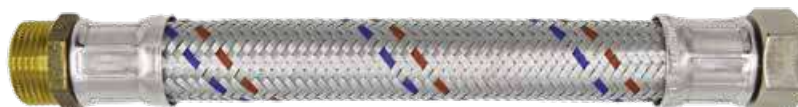

Male (Brass fittings)

Female (Brass fittings)

● G 2"

CODE	FITTINGS	DN	LENGHT mm			
ZZMBNS0300LAE	Male (Brass fittings) G 2"	50	300	1.641	1	-
ZZMBNS0400LAE			400	1.864	1	-
ZZMBNS0500LAE			500	2.087	1	-
ZZMBNS0600LAE			600	2.310	1	-
ZZMBNS0700LAE	Female (Brass fittings) G 2"	50	700	2.533	1	-
ZZMBNS0800LAE			800	2.756	1	-
ZZMBNS1000LAE			1000	3.202	1	-



DN
32
40
50



Max temperature
110 °C



Max pressure
6 bar
6 bar
6 bar



Flow rate at 3 bar
490 l/min
800 l/min
1300 l/min



Min. bending radius
168 mm
212 mm
275 mm



Inliner pipe
EPDM



Braiding
GALVANIZED STEEL



Fittings
CW617N



Instructions
Pag. 118

AC 1505




● G 1/2



● G 1/2

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
QZMFHS0300LAE	Female (Brass fittings) G 1/2	15	300	185	5	-
QZMFHS0400LAE			400	220	5	-
QZMFHS0500LAE			500	255	5	-
QZMFHS0600LAE			600	289	5	-
QZMFHS0700LAE	Female (Brass fittings) G 1/2	15	700	323	5	-
QZMFHS0800LAE			800	358	5	-
QZMFHS1000LAE			1000	427	5	-

AC 1808




● G 3/4



● G 3/4

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
SZMGBS0300LAE	Female (Brass fittings) G 3/4	18	300	270	5	-
SZMGBS0400LAE			400	321	5	-
SZMGBS0500LAE			500	372	5	-
SZMGBS0600LAE			600	423	5	-
SZMGBS0700LAE	Female (Brass fittings) G 3/4	18	700	474	5	-
SZMGBS0800LAE			800	525	5	-
SZMGBS1000LAE			1000	627	5	-

AC 2505




● G 1"



● G 1"

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
TZMFAS0300LAE	Female (Brass fittings) G 1"	25	300	508	5	-
TZMFAS0400LAE			400	578	5	-
TZMFAS0500LAE			500	649	5	-
TZMFAS0600LAE			600	720	5	-
TZMFAS0700LAE	Female (Brass fittings) G 1"	25	700	790	5	-
TZMFAS0800LAE			800	861	5	-
TZMFAS1000LAE			1000	1.002	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings

CW617N



Instructions

Pag. 118

AC 3205




● G 1" 1/4



● G 1" 1/4

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
VZMFES0300LAE	Female (Brass fittings) G 1" 1/4	32	300	704	2	-
VZMFES0400LAE			400	812	2	-
VZMFES0500LAE			500	920	2	-
VZMFES0600LAE			600	1.028	2	-
VZMFES0700LAE	Female (Brass fittings) G 1" 1/4		700	1.136	2	-
VZMFES0800LAE			800	1.244	2	-
VZMFES1000LAE			1000	1.460	2	-

AC 4004




● G 1" 1/2



● G 1" 1/2

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
XZMFGS0300LAE	Female (Brass fittings) G 1" 1/2	40	300	1.180	2	-
XZMFGS0400LAE			400	1.341	2	-
XZMFGS0500LAE			500	1.501	2	-
XZMFGS0600LAE			600	1.662	2	-
XZMFGS0700LAE	Female (Brass fittings) G 1" 1/2		700	1.823	2	-
XZMFGS0800LAE			800	1.983	2	-
XZMFGS1000LAE			1000	2.305	2	-

AC 5004




● G 2"



● G 2"

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
ZZMGAS0300LAE	Female (Brass fittings) G 2"	50	300	1.672	1	-
ZZMGAS0400LAE			400	1.895	1	-
ZZMGAS0500LAE			500	2.118	1	-
ZZMGAS0600LAE			600	2.341	1	-
ZZMGAS0700LAE	Female (Brass fittings) G 2"		700	2.564	1	-
ZZMGAS0800LAE			800	2.787	1	-
ZZMGAS1000LAE			1000	3.233	1	-



DN
32
40
50



Max temperature
110 °C



Max pressure
6 bar
6 bar
6 bar



Flow rate at 3 bar
490 l/min
800 l/min
1300 l/min



Min. bending radius
168 mm
212 mm
275 mm



Inliner pipe
EPDM



Braiding
GALVANIZED STEEL



Fittings
CW617N



Instructions
Pag. 118

AC 1506




● G 1/2



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 1/2

CODE	FITTINGS	DN	LENGHT mm			
QZMECS0300LAE	Male (Brass fittings) G 1/2	15	300	195	5	-
QZMECS0400LAE			400	230	5	-
QZMECS0500LAE			500	265	5	-
QZMECS0600LAE			600	299	5	-
QZMECS0700LAE	Elbow Female (Brass fittings) G 1/2	15	700	333	5	-
QZMECS0800LAE			800	368	5	-
QZMECS1000LAE			1000	437	5	-

AC 1809




● G 3/4



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
SZMENS0300LAE	Male (Brass fittings) G 3/4	18	300	272	5	-
SZMENS0400LAE			400	323	5	-
SZMENS0500LAE			500	374	5	-
SZMENS0600LAE			600	425	5	-
SZMENS0700LAE	Elbow Female (Brass fittings) G 3/4	18	700	476	5	-
SZMENS0800LAE			800	527	5	-
SZMENS1000LAE			1000	627	5	-

AC 2506




● G 1"



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TZMDUS0300LAE	Male (Brass fittings) G 1"	25	300	413	2	-
TZMDUS0400LAE			400	483	2	-
TZMDUS0500LAE			500	554	2	-
TZMDUS0600LAE			600	625	2	-
TZMDUS0700LAE	Elbow Female (Brass fittings) G 1"	25	700	695	2	-
TZMDUS0800LAE			800	766	2	-
TZMDUS1000LAE			1000	906	2	-

AC 3206




● G 1" 1/4



Male (Brass fittings)

Elbow Female

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VZMDYS0300LAE	Male (Brass fittings) G 1" 1/4	32	300	715	2	-
VZMDYS0400LAE			400	823	2	-
VZMDYS0500LAE			500	931	2	-
VZMDYS0600LAE			600	1.039	2	-
VZMDYS0700LAE	Stainless steel Elbow Female G 1" 1/4	32	700	1.147	2	-
VZMDYS0800LAE			800	1.255	2	-
VZMDYS1000LAE			1000	1.470	2	-



DN

15
18
25
32

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar
6 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min
490 l/min

Min. bending radius

80 mm
104 mm
132 mm
168 mm

Inliner pipe

EPDM



Braiding

GALVANIZED STEEL



Fittings

CW617N



Instructions

Pag. 118



FLEXIBLE HOSES FOR INDUSTRIAL APPLIANCES

4.3 / ACFX

ACFX STAINLESS STEEL FLEXIBLES



Clad in stainless steel braid with brass fittings, they are suitable for connecting pumps, boilers, autoclaves and upri-

ghts, ideal for industrial applications. They are available from diameter DN15 to DN50.

TECHNICAL DATA



DN

15
18
25
32
40
50



Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar
6 bar
6 bar
6 bar



Flow rate at 3 bar

83 l/min
200 l/min
280 l/min
490 l/min
800 l/min
1300 l/min



Min. bending radius

80 mm
104 mm
132 mm
168 mm
212 mm
275 mm



Inliner pipe

EPDM



Braiding

INOX AISI 304



Fittings

CW617N

APPLICATIONS



pumps



mounting columns



heating systems



conditioning systems



generic installations

INLINER PIPE



EPDM

EPDM rubber is the most widespread inliner material. Available in various compounds, it shows excellent hygienic and mechanical characteristics as well as resistance to oxidation, environmental factors and high temperatures.

TYPE OF FITTINGS

Male

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Female

G 1/2
G 3/4
G 1"
G 1" 1/4
G 1" 1/2
G 2"



Elbow Female

G 1/2
G 3/4
G 1"
G 1" 1/4



APPROVALS

EN 13618
UE



DN 15-18-25



TÜV
Germany



Instructions
Pag. 118

Please contact our technical department for further information

AC 1507




● G 1/2



Male (Brass fittings)

Female (Brass fittings)

● G 1/2

CODE	FITTINGS	DN	LENGHT mm			
QCMANS0300TAE	Male (Brass fittings) G 1/2	15	300	167	5	-
QCMANS0400TAE			400	196	5	-
QCMANS0500TAE			500	225	5	-
QCMANS0600TAE			600	254	5	-
QCMANS0700TAE	Female (Brass fittings) G 1/2		700	283	5	-
QCMANS0800TAE			800	612	5	-
QCMANS1000TAE			1000	871	5	-

AC 1810




● G 3/4



Male (Brass fittings)

Female (Brass fittings)

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
SCMBSS0300TAE	Male (Brass fittings) G 3/4	18	300	247	5	-
SCMBSS0400TAE			400	291	5	-
SCMBSS0500TAE			500	335	5	-
SCMBSS0600TAE			600	379	5	-
SCMBSS0700TAE	Female (Brass fittings) G 3/4		700	423	5	-
SCMBSS0800TAE			800	467	5	-
SCMBSS1000TAE			1000	555	5	-

AC 2507




● G 1"



Male (Brass fittings)

Female (Brass fittings)

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TCMAAS0300TAE	Male (Brass fittings) G 1"	25	300	398	5	-
TCMAAS0400TAE			400	464	5	-
TCMAAS0500TAE			500	529	5	-
TCMAAS0600TAE			600	594	5	-
TCMAAS0700TAE	Female (Brass fittings) G 1"		700	660	5	-
TCMAAS0800TAE			800	725	5	-
TCMAAS1000TAE			1000	856	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

INOX AISI 304



Fittings

CW617N



Instructions

Pag. 118

AC 3207

● G 1" 1/4



Male (Brass fittings)

Female (Brass fittings)

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VCMAFS0300TAE	Male (Brass fittings) G 1" 1/4	32	300	684	2	-
VCMAFS0400TAE			400	780	2	-
VCMAFS0500TAE			500	876	2	-
VCMAFS0600TAE			600	972	2	-
VCMAFS0700TAE	Female (Brass fittings) G 1" 1/4	32	700	1.068	2	-
VCMAFS0800TAE			800	1.164	2	-
VCMAFS1000TAE			1000	1.356	2	-

AC 4005

● G 1" 1/2



Male (Brass fittings)

Female (Brass fittings)

● G 1" 1/2

CODE	FITTINGS	DN	LENGHT mm			
XCMAES0300TAE	Male (Brass fittings) G 1" 1/2	40	300	1.136	2	-
XCMAES0400TAE			400	1.296	2	-
XCMAES0500TAE			500	1.456	2	-
XCMAES0600TAE			600	1.616	2	-
XCMAES0700TAE	Female (Brass fittings) G 1" 1/2	40	700	1.776	2	-
XCMAES0800TAE			800	1.936	2	-
XCMAES1000TAE			1000	2.256	2	-

AC 5005

● G 2"



Male (Brass fittings)

Female (Brass fittings)

● G 2"

CODE	FITTINGS	DN	LENGHT mm			
ZCMBNS0300TAE	Male (Brass fittings) G 2"	50	300	1.618	1	-
ZCMBNS0400TAE			400	1.840	1	-
ZCMBNS0500TAE			500	2.063	1	-
ZCMBNS0600TAE			600	2.285	1	-
ZCMBNS0700TAE	Female (Brass fittings) G 2"	50	700	2.507	1	-
ZCMBNS0800TAE			800	2.729	1	-
ZCMBNS1000TAE			1000	3.174	1	-



DN
32
40
50



Max temperature
110 °C



Max pressure
6 bar
6 bar
6 bar



Flow rate at 3 bar
490 l/min
800 l/min
1300 l/min



Min. bending radius
168 mm
212 mm
275 mm



Inliner pipe
EPDM



Braiding
INOX AISI 304



Fittings
CW617N



Instructions
Pag. 118

AC 1508




● G 1/2



● G 1/2

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
QCMFHS0300TAE	Female (Brass fittings) G 1/2	15	300	171	5	-
QCMFHS0400TAE			400	200	5	-
QCMFHS0500TAE			500	229	5	-
QCMFHS0600TAE			600	258	5	-
QCMFHS0700TAE	Female (Brass fittings) G 1/2		700	287	5	-
QCMFHS0800TAE			800	316	5	-
QCMFHS1000TAE			1000	374	5	-

AC 1811




● G 3/4



● G 3/4

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
SCMGBS0300TAE	Female (Brass fittings) G 3/4	18	300	251	5	-
SCMGBS0400TAE			400	295	5	-
SCMGBS0500TAE			500	339	5	-
SCMGBS0600TAE			600	383	5	-
SCMGBS0700TAE	Female (Brass fittings) G 3/4		700	427	5	-
SCMGBS0800TAE			800	471	5	-
SCMGBS1000TAE			1000	559	5	-

AC 2508




● G 1"



● G 1"

Female (Brass fittings)

Female (Brass fittings)

CODE	FITTINGS	DN	LENGHT mm			
TCMFAS0300TAE	Female (Brass fittings) G 1"	25	300	403	5	-
TCMFAS0400TAE			400	469	5	-
TCMFAS0500TAE			500	534	5	-
TCMFAS0600TAE			600	599	5	-
TCMFAS0700TAE	Female (Brass fittings) G 1"		700	665	5	-
TCMFAS0800TAE			800	730	5	-
TCMFAS1000TAE			1000	861	5	-



DN

15
18
25

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min

Min. bending radius

80 mm
104 mm
132 mm

Inliner pipe

EPDM



Braiding

INOX AISI 304



Fittings

CW617N



Instructions

Pag. 118

AC 3208

● G 1" 1/4



Female (Brass fittings)

Female (Brass fittings)

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VCMFES0300TAE	Female (Brass fittings) G 1" 1/4	32	300	673	2	-
VCMFES0400TAE			400	769	2	-
VCMFES0500TAE			500	865	2	-
VCMFES0600TAE			600	961	2	-
VCMFES0700TAE	Female (Brass fittings) G 1" 1/4	32	700	1.057	2	-
VCMFES0800TAE			800	1.154	2	-
VCMFES1000TAE			1000	1.346	2	-

AC 4006

● G 1" 1/2



Female (Brass fittings)

Female (Brass fittings)

● G 1" 1/2

CODE	FITTINGS	DN	LENGHT mm			
XCMFGS0300TAE	Female (Brass fittings) G 1" 1/2	40	300	1.176	2	-
XCMFGS0400TAE			400	1.336	2	-
XCMFGS0500TAE			500	1.496	2	-
XCMFGS0600TAE			600	1.656	2	-
XCMFGS0700TAE	Female (Brass fittings) G 1" 1/2	40	700	1.816	2	-
XCMFGS0800TAE			800	1.976	2	-
XCMFGS1000TAE			1000	2.296	2	-

AC 5006

● G 2"



Female (Brass fittings)

Female (Brass fittings)

● G 2"

CODE	FITTINGS	DN	LENGHT mm			
ZCMGAS0300TAE	Female (Brass fittings) G 2"	50	300	1.628	1	-
ZCMGAS0400TAE			400	1.850	1	-
ZCMGAS0500TAE			500	2.073	1	-
ZCMGAS0600TAE			600	2.295	1	-
ZCMGAS0700TAE	Female (Brass fittings) G 2"	50	700	2.517	1	-
ZCMGAS0800TAE			800	2.739	1	-
ZCMGAS1000TAE			1000	3.184	1	-



DN
32
40
50



Max temperature
110 °C



Max pressure
6 bar
6 bar
6 bar



Flow rate at 3 bar
490 l/min
800 l/min
1300 l/min



Min. bending radius
168 mm
212 mm
275 mm



Inliner pipe
EPDM



Braiding
INOX AISI 304



Fittings
CW617N



Instructions
Pag. 118

AC 1509




● G 1/2



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 1/2

CODE	FITTINGS	DN	LENGHT mm			
QCMECS0300TAE	Male (Brass fittings) G 1/2	15	300	183	5	-
QCMECS0400TAE			400	212	5	-
QCMECS0500TAE			500	241	5	-
QCMECS0600TAE			600	270	5	-
QCMECS0700TAE	Elbow Female (Brass fittings) G 1/2		700	299	5	-
QCMECS0800TAE			800	328	5	-
QCMECS1000TAE			1000	386	5	-

AC 1812




● G 3/4



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
SCMENS0300TAE	Male (Brass fittings) G 3/4	18	300	256	5	-
SCMENS0400TAE			400	300	5	-
SCMENS0500TAE			500	344	5	-
SCMENS0600TAE			600	388	5	-
SCMENS0700TAE	Elbow Female (Brass fittings) G 3/4		700	432	5	-
SCMENS0800TAE			800	476	5	-
SCMENS1000TAE			1000	564	5	-

AC 2509




● G 1"



Male (Brass fittings)

Elbow Female (Brass fittings)

● G 1"

CODE	FITTINGS	DN	LENGHT mm			
TCMDUS0300TAE	Male (Brass fittings) G 1"	25	300	400	2	-
TCMDUS0400TAE			400	466	2	-
TCMDUS0500TAE			500	531	2	-
TCMDUS0600TAE			600	596	2	-
TCMDUS0700TAE	Elbow Female (Brass fittings) G 1"		700	662	2	-
TCMDUS0800TAE			800	727	2	-
TCMDUS1000TAE			1000	858	2	-

AC 3209




● G 1" 1/4



Male (Brass fittings)

Elbow Female

● G 1" 1/4

CODE	FITTINGS	DN	LENGHT mm			
VCMDYS0300TAE	Male (Brass fittings) G 1" 1/4	32	300	689	2	-
VCMDYS0400TAE			400	785	2	-
VCMDYS0500TAE			500	881	2	-
VCMDYS0600TAE			600	977	2	-
VCMDYS0700TAE	Stainless steel Elbow Female G 1" 1/4		700	1.073	2	-
VCMDYS0800TAE			800	1.169	2	-
VCMDYS1000TAE			1000	1.361	2	-



DN

15
18
25
32

Max temperature

110 °C



Max pressure

10 bar
10 bar
10 bar
6 bar

Flow rate at 3 bar

83 l/min
200 l/min
280 l/min
490 l/min

Min. bending radius

80 mm
104 mm
132 mm
168 mm

Inliner pipe

EPDM



Braiding

INOX AISI 304



Fittings

CW617N



Instructions

Pag. 118



FLEXIBLE HOSES FOR INDUSTRIAL APPLIANCES

4.4 / ACEX

ACEX EXTENSIBLE HOSES



For the connection between the water network and the wall boilers. Extendable metal hose with stainless steel bellows

available in different sizes to meet the needs of the installer and the manufacturers of wall-hung boilers.

TECHNICAL DATA



DN

15
20
25



Max temperature

90 °C



Max pressure

6
4
4



Flow rate at 3 bar

-



Min. bending
radius

-



Inliner pipe

AISI 316



Braiding

-



Fittings

AISI 303
CW614N

APPLICATIONS



pumps



mounting columns



heating
systems



conditioning
systems



generic
installations

TYPE OF FITTINGS

Male

R 1/2
R 3/4
R 1"



Female

G 1/2
G 3/4
G 1"



Instructions
Pag. 118




Please contact our technical department for further information

AC 1510

● G 1/2



● G 1/2




CODE	FITTINGS	DN	LENGHT mm			
81200100	Male R 1/2 Female G 1/2	15	90 x 140	78	-	10
81200200			130 x 220	86	-	10
81200300			220 x 420	112	-	10

AC 1511

● G 1/2



● G 3/4




CODE	FITTINGS	DN	LENGHT mm			
81210100	Male R 1/2 Female G 3/4	15	90 x 140	100	-	10
81210200			130 x 220	112	-	10
81210300			220 x 420	152	-	10

AC 2001

● G 3/4



● G 3/4




CODE	FITTINGS	DN	LENGHT mm			
81220100	Male R 3/4 Female G 3/4	20	90 x 140	102	-	10
81220200			130 x 220	118	-	10
81220300			220 x 420	164	-	10

AC 2510

● G 1"



● G 1"

CODE	FITTINGS	DN	LENGHT mm			
81230100	Male R 1" Female G 1"	25	90 x 140	196	-	10
81230200			130 x 220	222	-	10
81230300			220 x 420	296	-	10

DN
15
20
25Max temperature
90 °CMax pressure
6
4
4Flow rate at 3 bar
-Min. bending radius
-Inliner pipe
AISI 316Braiding
-Fittings
AISI 303
CW614NInstructions
Pag. 118

ASSEMBLY INSTRUCTIONS


Luxor's flexible hoses are produced for water adduction and distribution. The use of other liquid elements or chemical solutions is not guaranteed if not clearly agreed with the Technical Office.

Always carry out system test after the installation of the flexible hoses to check leakages or functional products defects.

Test the correct grounding of the electrical appliances (air conditioning systems, whirlpools, etc.) where hoses are connected. Any possible electrical dispersion could favor corrosive actions.

For installations in rooms with high humidity, where there is condensation, it is necessary to use flexible hoses with braiding and ferrules in stainless steel.

Design the system using hoses of adequate length and fittings to minimise hose twists and tensions (always check the product datasheets).

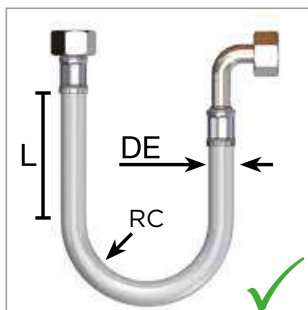


$RC \geq 4 DE$ $L \geq 4 DE$



Always check that ferrules are pressed correctly and there are no braiding threads coming out. In case of doubts do not install the flexible hose.



The hoses must maintain a straight section at the connections equal to 4 times the external diameter of the hose (DN6 = Ø 10 mm → straight section 40 mm). The bending radius must not be less than 4 times the external diameter of the hose (DN6 = Ø 10 mm → bending radius 40 mm).

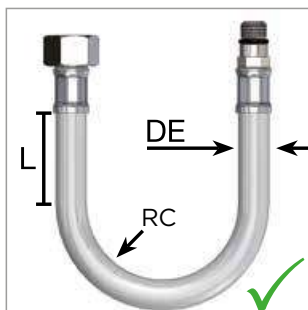



$RC \geq 4 DE$ $L \geq 4 DE$



Do not install flexible hoses under twisting or tension conditions.




It must be possible to inspect the hoses. Do not install inside walls or in tunnels that cannot be inspected. Do not cover with insulating material (except for hoses with stainless steel braid and stainless steel ferrules).

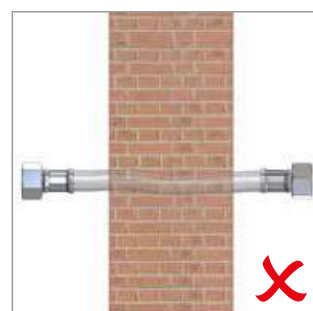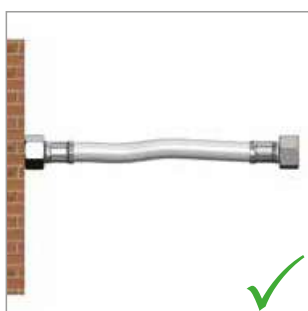


Use only tools suitable for the type of product. The tools must only be used in the presence of a hexagonal nut. Any other configuration (cylindrical fitting, knurled ring nut, ...) must be closed by hand (closing force not exceeding 3 Nm).



Do not use any tools on the ferules. A force applied to this ferule often causes it to become damaged with consequent breakage of the hose.

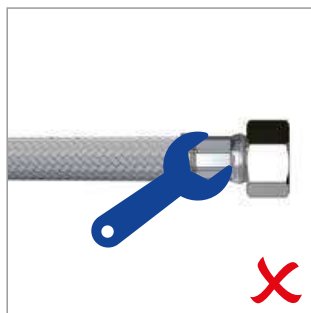

Never assemble two or more hoses in series. If necessary, choose a longer length.

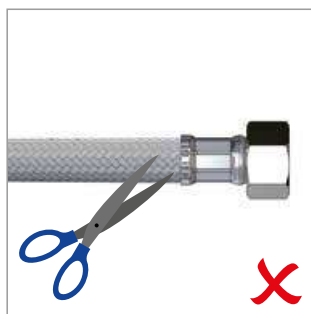

Avoid striking the hose with sharp or pointed objects to avoid damaging the external braid.

NORMAL END CONNECTION FITTINGS


For a correct assembly please keep to the follow below instructions:

- check the threading of the fitting (A) of the flexible hose which must be corresponding to the one of the faucet's body (B);
- check that the gasket is regularly placed on the female fitting (C);
- do not use hemp and/or Teflon on the thread (A) of the fitting.

Attention! Clamps from 2 to 3 Nm.

The male with o-ring seat are specially studied to guarantee the tightness between the fitting and the body of the faucet.


It is not necessary to tighten with a key, the strength of the hand is enough.

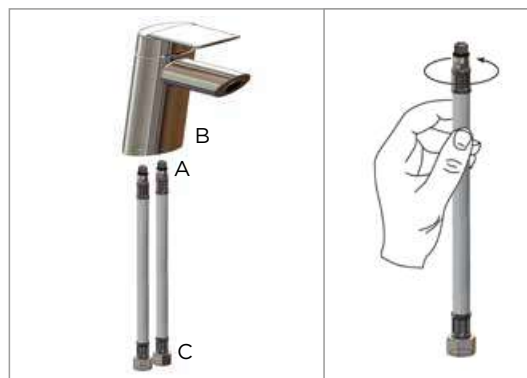

COMPRESSION FITTINGS

For a correct assembly please keep to the following instructions:

- check that the cartridge (2) is correctly installed as per scheme since if this is upside down it causes tightening problems;
- the tightening fittings must be connected to pipes with a wall thickness not less than 0,75 mm. The compression fittings RCG, RCC and RCB must be tightened with a clamping couple in a range 25 and 30 Nm.

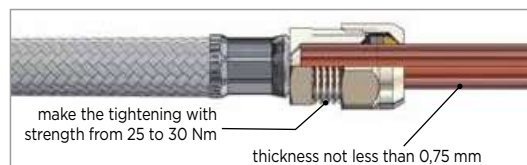


MAINTENANCE INSTRUCTIONS

- Periodically monitor the state of the hoses.
In case of oxidation or evident state of wear, replace.
 - Avoid direct or indirect exposure to corrosive substances, including substances used for cleaning (bleach and similar substances).
 - For cleaning only use damp (not wet) cloths without the aid of cleaning substances.
 - Avoid striking the hose with sharp or pointed objects
- to avoid breaking the external braid (including boxes and containers made of metal, wood or other materials).
- In the case of systems in periodically uninhabited places (for example holiday homes or in places with particularly harsh climatic conditions) always check closure of the system and, in any case, avoid leaving the system pressurised.

LENGTH INSTRUCTIONS

All hose assemblies shall be manufactured in lengths L measured as shown in Figure from a minimum of 90 mm to a maximum of 2000 mm, in compliance with standard EN 13618.

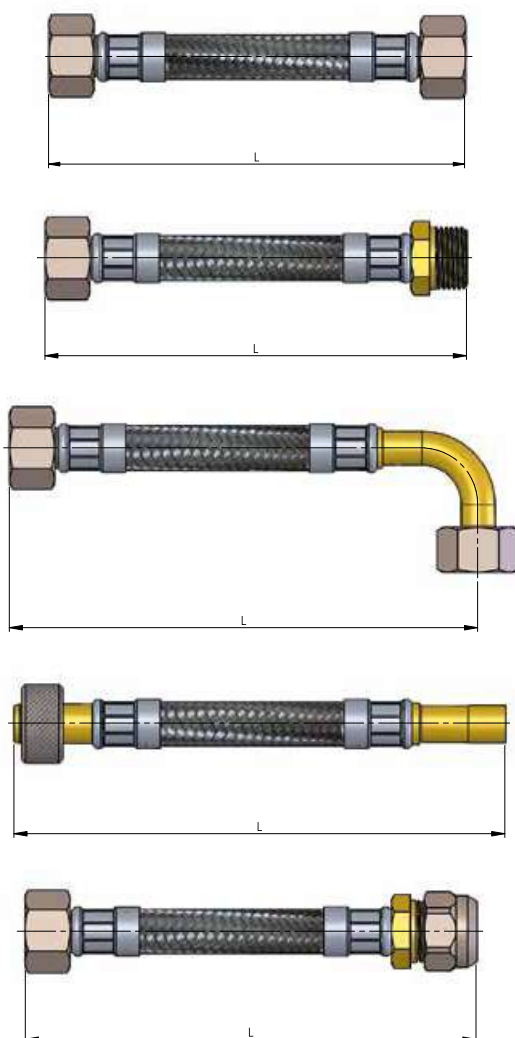

The actual length compared with the length L declared by the supplier shall be within the following permissible tolerances, in compliance with standard EN 13618:

- | | |
|---------------------------------------|-------------|
| • $L \leq 400$ mm: | +10 mm
0 |
| • $400 \text{ mm} < L \leq 1000$ mm: | +20 mm
0 |
| • $1000 \text{ mm} < L \leq 2000$ mm: | +30 mm
0 |

CONDITION OF SALE

ORDERS

Contracts entered by agents or representative are not definitive until they are regularly accepted by supplier. The orders sent either through our Agents or directly, are accepted under the "General Sales Conditions" described in the present Price List terms, and will agree, without reservation, to the terms below.

INCOTERMS

The consignments are always Ex works unless differently agreed in the sales contract.

PAYMENT TERMS

The payment terms are those specified in the offers and the order confirmation and are binding.

In case of delay of payment with respect to the agreed due terms, the commercial interest shall be calculated. The delayed payment of previous supplies will authorize us to cancel all orders in progress. Agents and representative are not entitled to collect credits, unless clearly authorised in writing by the supplier.

CLAIMS

Claims on quantities will be accepted within 8 days from the date of receipt of goods. The supplier will not be responsible for missing or damaged packages, unless in the despatch note it is clearly written "accepted with reservation".

COURT

For any controversies the place of jurisdiction shall be: the Court of Law of Brescia.

PRICES

Prices indicated are those clearly agreed in the contract sales confirmed by our order confirmation.

DELIVERY TERMS

The articles part of this catalogue will be consigned within a term of 90 days from order acceptance. Any date inferior to this term is not to be considered accepted unless confirmed in order confirmation.

The delivery times are not binding for the supplier, who will not respond for any damages arising directly or indirectly from delivery delays, or from a total or partial interruption of the supply.

PACKAGING

The standard packaging is at suppliers charges.

The standard packaging does not include special out of size or particular. Where any special packaging is required this will be at customer's charges, unless previously agreed in writing in the contract sales.

RETURN OF GOODS

No goods will be accepted without our previous authorization.

MINIMUM ORDER VALUE

The supplier in addition to checking the feasibility will have the right to deliver orders with a minimum value of 500 Euro.

WARRANTY

The guarantee terms refer to article 3 and 5 of the 199/44/CE Directive. The guarantee is supported by an adequate insurance policy for the "Product Third Party Liability". The guarantee declines any responsibility whereas the installation and the test have not been correctly carried out. The wholesalers and the retailers are compelled to illustrate to their customers and installers all the useful care for a correct installation of our materials.

CATALOGUE VALIDITY

Illustrations, data and references published in this issue are not binding on the supplier who reserves the right to make reasonable changes, both technical and commercial, at his discretion at any time, still without lowering the design performance of the goods.