



FLEXIBLE HOSES FOR HOUSEHOLD APPLIANCES

3.1 / E-FLEX INOX

E-FLEX INOX

FOR HOUSEHOLD APPLIANCES



Pipe for connection of household appliances in diameters DN8, DN10 and DN13. The external stainless steel braid guarantees durability and resistance to external agents, main-

taining a discrete flexibility as well as a high resistance to pressure and temperature, ideal for hot water. Available with stainless steel braid and socket and brass fittings.

TECHNICAL DATA



DN

8
10
13



Max temperature

70 °C



Max pressure

10 bar



Flow rate at 3 bar

28 l/min
46 l/min
74 l/min



Min. bending radius
48 mm
56 mm
72 mm



Inliner pipe

EPDM



Braiding

INOX AISI
304



Fittings

CW617N

APPLICATIONS



washing machines



dishwasher

INLINER PIPE



EPDM

EPDM rubber is the most widespread inliner material. Available in various compounds, it shows excellent hygienic and mechanical characteristics as well as resistance to oxidation, environmental factors and high temperatures.

TYPE OF FITTINGS

Female with gasket inserted
G 3/4



Elbow female with gasket inserted
G 3/4



APPROVALS

EN 13618
UE



Instructions
Pag. 438

Please contact our technical department for further information

EFI 801

● G 3/4



● G 3/4

Female with gasket inserted

Female with gasket inserted

CODE	FITTINGS	DN	LENGHT mm			
CGGGRS1000LAN	Female with gasket inserted G 3/4	8	1000	228	-	10
CGGGRS1500LAN			1500	290	-	10
CGGGRS2000LAN			2000	352	-	10
CGGGRS2500LAN	Female with gasket inserted G 3/4		2500	415	-	10
CGGGRS3000LAN			3000	477	-	10

EFI 1001

● G 3/4



● G 3/4

Female with gasket inserted

Female with gasket inserted

CODE	FITTINGS	DN	LENGHT mm			
FGGGRS1000LAN	Female with gasket inserted G 3/4	10	1000	246	-	10
FGGGRS1500LAN			1500	319	-	10
FGGGRS2000LAN			2000	393	-	10
FGGGRS2500LAN	Female with gasket inserted G 3/4		2500	466	-	10
FGGGRS3000LAN			3000	539	-	10

EFI 1301

● G 3/4



● G 3/4

Female with gasket inserted

Female with gasket inserted

CODE	FITTINGS	DN	LENGHT mm			
MGGGRS1000LAN	Female with gasket inserted G 3/4	13	1000	350	-	10
MGGGRS1500LAN			1500	472	-	10
MGGGRS2000LAN			2000	594	-	10
MGGGRS2500LAN	Female with gasket inserted G 3/4		2500	717	-	5
MGGGRS3000LAN			3000	839	-	5



DN
8
10
13



Max temperature
70 °C



Max pressure
10 bar



Flow rate at 3 bar
28 l/min
46 l/min
74 l/min



Min. bending radius
48 mm
56 mm
72 mm



Inliner pipe
EPDM



Braiding
INOX AISI 304



Fittings
CW617N



Instructions
Pag. 438

EFI 802

● G 3/4



Female with gasket inserted

Elbow Female with gasket inserted

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
CGGHZS1000LAN	Female with gasket inserted G 3/4	8	1000	224	-	10
CGGHZS1500LAN			1500	286	-	10
CGGHZS2000LAN	Elbow Female with gasket inserted G 3/4		2000	349	-	10
CGGHZS2500LAN			2500	411	-	10
CGGHZS3000LAN			3000	474	-	10

EFI 1002

● G 3/4



Female with gasket inserted

Elbow Female with gasket inserted

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
FGGHZS1000LAN	Female with gasket inserted G 3/4	10	1000	259	-	10
FGGHZS1500LAN			1500	332	-	10
FGGHZS2000LAN	Elbow Female with gasket inserted G 3/4		2000	405	-	10
FGGHZS2500LAN			2500	479	-	10
FGGHZS3000LAN			3000	552	-	10

EFI 1302

● G 3/4



Female with gasket inserted

Elbow Female with gasket inserted

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
MGGHZS1000LAN	Female with gasket inserted G 3/4	13	1000	360	-	10
MGGHZS1500LAN			1500	482	-	10
MGGHZS2000LAN	Elbow Female with gasket inserted G 3/4		2000	605	-	10
MGGHZS2500LAN			2500	727	-	5
MGGHZS3000LAN			3000	849	-	5



DN
8
10
13



Max temperature
70 °C



Max pressure
10 bar



Flow rate at 3 bar
28 l/min
46 l/min
74 l/min



Min. bending radius
48 mm
56 mm
72 mm



Inliner pipe
EPDM



Braiding
INOX AISI 304



Fittings
CW617N



Instructions
Pag. 438



FLEXIBLE HOSES FOR HOUSEHOLD APPLIANCES

3.2 / E-FLEX

E-FLEX WITHOUT BRAIDING



Reinforced PVC hose for cold water, with nylon fittings; available in versions with female/female and female/female curved nylon fittings, always with gasket inserted.

TECHNICAL DATA



DN

10



Max temperature

30 °C



Max pressure

10 bar



Flow rate at 3 bar

46 l/min



Min. bending radius
60 mm



Inliner pipe

PVC



Braiding

-



Fittings

NYLON PA
6.6

APPLICATIONS



washing machines



dishwasher

TYPE OF FITTINGS

**Female nylon
with gasket
inserted**
G 3/4




**Elbow Female
nylon with
gasket inserted**
G 3/4



Instructions
Pag. 438

Please contact our technical department for further information

EF 1001

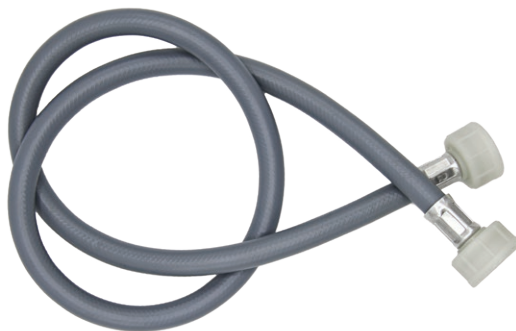

Female nylon with gasket inserted

● G 3/4

Female nylon with gasket inserted

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
60108210	Female nylon with gasket inserted G 3/4	10	1000	156	-	10
60108215			1500	218	-	10
60108220			2000	288	-	10
60108225	Female nylon with gasket inserted G 3/4	10	2500	382	-	5
60108230			3000	420	-	5

EF 1002



Female nylon with gasket inserted

● G 3/4

Elbow Female nylon with gasket inserted

● G 3/4

CODE	FITTINGS	DN	LENGHT mm			
60108010	Female nylon with gasket inserted G 3/4	10	1000	164	-	10
60108015			1500	218	-	10
60108020			2000	290	-	10
60108025	Elbow Female nylon with gasket inserted G 3/4	10	2500	388	-	5
60108030			3000	420	-	5

EF 1003

Polypropylene out pipe with elbow included.



CODE	FITTINGS	DN	LENGHT mm			
60001000	Hose ø 19 x 25	10	1000	80	-	10
60001500			1500	102	-	10
60002000			2000	122	-	10
60002500	Collar ø 19 - ø 21	10	2500	148	-	10
60003000			3000	168	-	10

EF 1004

EPDM gaskets without net.



CODE	FITTINGS	DN	LENGHT mm			
60120000CF	G 3/4	10	-	1	100	-



DN
10



Max temperature
30 °C



Max pressure
10 bar



Flow rate at 3 bar
46 l/min



Min. bending radius
60 mm



Inliner pipe
PVC



Braiding
-



Fittings
NYLON PA 6.6



Instructions
Pag. 438

